



FOREST LIGHTING

Sustainable illumination



T8 Glass Double-Ended LED Lamp

Forest Lighting T8 Glass Double-Ended LED Lamps are an economical choice for both retrofit and new construction applications. These T8 Glass LED tubes incorporate integral drivers which simplify lighting systems by eliminating the need to connect the LED lamp to a fluorescent ballast. Four-foot Forest Lighting T8 Glass double-ended LED Lamps connect directly to line voltage for easy installation and are offered in three wattages and 4 color temperatures. They also provide a wider beam spread of 170 degrees. Forest Lighting T8 Glass LED lamps are a highly affordable option when replacing T8 fluorescent lamps.

T8 GLASS DOUBLE-ENDED LED LAMP MODELS

MODEL NO.	DESCRIPTION	INPUT POWER	DELIVERED LIGHT OUTPUT (LM)
T8T4XX-10-G-DE-LS	4'	10	1500
T8T4XX-12-G-DE-LS	4'	12	1600
T8T4XX-12-E-G-DE-LS	4'	12	1800
T8T4XX-15-G-DE-LS	4'	15	2000

6000K is Non-Stock Item & Not DLC

FEATURES & BENEFITS

- Operates directly from line voltage
- Compatible with voltages 100-277V
- Rated lifetime of 50,000 hrs

WARRANTY

5 Year Warranty



LISTINGS AND CERTIFICATIONS PENDING




T8 Glass Double-Ended LED Lamp

SPECIFICATION INFORMATION

Input Voltage	100-277V, 50/60Hz
Power Factor	> 0.9
Total Harmonic Distortion	<20%
Correlated Color Temperature (CCT)	3500K, 4100K, 5000K, 6000K
Color Rendering Index	>80
Beam Angle	120°
Operating Temperature	-20° ~ +45°C
Base	Medium Bi-Pin (G13)

MECHANICAL SPECIFICATIONS

Model Series	Dimensions		
	A	B	H x W
T8T4	47.72"	47.17"	1.12"

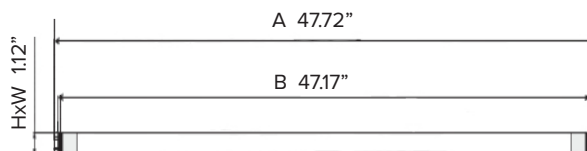

ORDERING INFORMATION

Ordering Information

Example: T8T441-10-G-DE-LS or T8T441-12-E-G-DE-LS

Product	Size	CCT	Input Power	E	Lens	Connection	LS
T8T	4 4'	35 3500K	10 10W	E High Efficacy	G Glass	DE Double-Ended	LS
		41 4100K	12 12W				
		50 5000K	15 15W				
		60 6000K					

6000K is Non-Stock Item & Not DLC
A high efficacy version is only available in 12W.