



FOREST LIGHTING

Sustainable illumination



Dimmable LED BR30



Dimmable

Forest Lighting dimmable LED BR30 bulb is ideal for hotels, restaurants, apartments and other residential buildings. Its typical Color Rendering Index of 92 makes colors more vibrant and richer in the environment it illuminates. By providing over 800lm while consuming only 11W, it replaces 65W incandescent lamps and saves tremendous amount of energy.



FEATURES & BENEFITS

- Ideal for hotels, restaurants, apartments and other residential buildings.
- CRI >90, R9=56
- Equivalent to 65W incandescent
- Rated lifetime of 25,000 Hrs
- Energy Star listed for rebates



BR30 MODELS

| MODEL NO. | INPUT POWER (W) | CCT | DELIVERED LIGHT OUTPUT (LM) |
|---------------------|-----------------|-------|-----------------------------|
| BR30-11W30KDH-L4-LS | 11 | 3000K | 800 |
| BR30-11W40KDH-L4-LS | 11 | 4000K | 800 |
| BR30-11W50KDH-L4-LS | 11 | 5000K | 800 |

WARRANTY
3 Year Warranty



LISTINGS AND CERTIFICATIONS



Dimmable LED BR30


SPECIFICATION INFORMATION

| | |
|---------------|----------------------|
| Input Power | 11W (65W equivalent) |
| Input Voltage | 120V / 60Hz |
| Input Current | 0.09A |
| Power Factor | > 0.9 |
| Base Type | E26 |

OPTICAL SPECIFICATIONS

| | |
|------------------------------------|---------------------|
| Correlated Color Temperature (CCT) | 3000K, 4000K, 5000K |
| Color Rendering Index | >90, R9=56 |
| Luminous Flux | 800 lm |
| Efficacy | 73lm/W |
| Beam Angle | 120° |

MECHANICAL SPECIFICATIONS

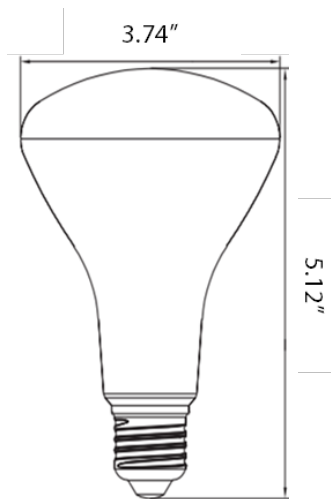


ORDERING INFORMATION

Example: BR30-11W30KDH-L4-LS

| Product | Nominal Input Power | CCT | DH-L4-LS |
|---------|---------------------|------------------|----------|
| BR30 | 11W 11W | 30K 3000K | |
| | | 40K 4000K | |
| | | 50K 5000K | |

Dimmable LED BR30

PHOTOMETRY

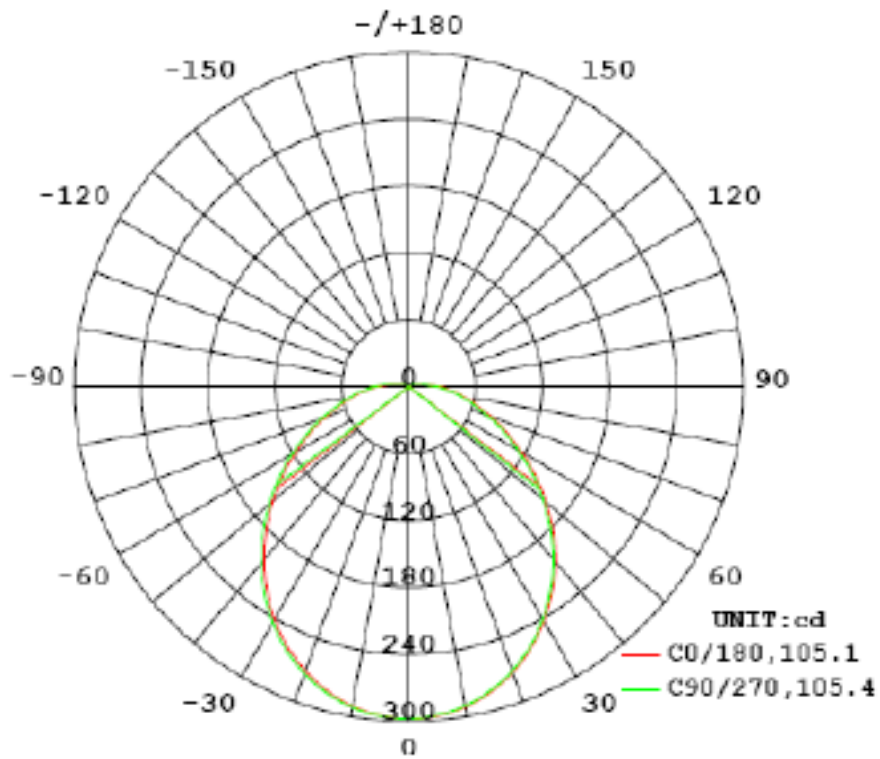

Performance Data

| | |
|------------------------|-------|
| Delivered Lumens (lms) | 881 |
| Input Wattage (W) | 10.27 |
| Efficacy (LpW) | 85.8 |
| Voltage (V) | 120 |