



## T8 Glass Single-Ended LED Lamp

Forest Lighting T8 Glass Single-Ended LED Lamps are an economical choice for both retrofit and new construction applications. These T8 Glass LED tubes incorporate integral drivers which simplify lighting systems by eliminating the need to connect the LED lamp to a fluorescent ballast. Four-foot Forest Lighting T8 Glass single-ended LED Lamps connect directly to line voltage for easy installation and are offered in three wattages and four color temperatures. They also provide a wider beam spread of 170 degrees. Forest Lighting T8 Glass LED lamps are a highly affordable option when replacing T8 fluorescent lamps.



### T8 LED GLASS LAMP MODELS

MODEL NO.	NOMINAL LENGTH	INPUT POWER (W)	DELIVERED LIGHT OUTPUT (LM)
T8T4XX-12-G-SE-LS	4'	12W	1600 lm
T8T4XX-15-G-SE-LS	4'	15W	1800 lm
T8T4XX-18-G-SE-LS	4'	18W	2200 lm

6000K is Non-Stock Item & Not DLC

### FEATURES & BENEFITS

- Operates directly from line voltage
- UL Classified in US and Canada
- Compatible with voltages 100-277V
- Rated lifetime of 35,000 hrs
- DLC Listed for utility rebates

### WARRANTY

5 Year Warranty



### LISTINGS AND CERTIFICATIONS




# T8 Single-Ended LED Glass Lamp

## SPECIFICATION INFORMATION

Input Voltage	100-277V, 50/60Hz
Power Factor	> 0.9
Total Harmonic Distortion	<20%
Correlated Color Temperture (CCT)	3500K, 4100K, 5000K, 6000K
Color Rendering Index	>80
Beam Angle	170°
Operating Temperature	-20° ~ +45°C
Base	Medium Bi-Pin (G13)

## MECHANICAL SPECIFICATIONS

Model Series	Dimensions			Weight
	A	B	H x W	
T8T4	47.72"	47.17"	1.12"	7.5 oz

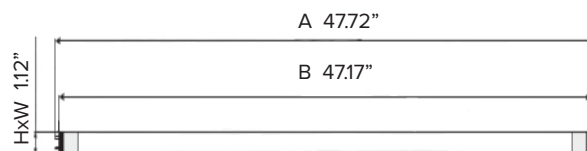

## ORDERING INFORMATION

Ordering Information for 4' 12W, 15W & 18W Models

Example: T8T441-12-G-SE-LS

Product	Size	CCT	Input Power	Lens	Connection	LS
T8T	<b>4</b> 4'	<b>35</b> 3500K	<b>-12</b> 12W	<b>G</b> Glass	<b>SE</b> Single Ended	<b>LS</b>
		<b>41</b> 4100K	<b>-15</b> 15W			
		<b>50</b> 5000K	<b>-18</b> 18W			
		<b>60</b> 6000K				

6000K is Non-Stock Item & Not DLC